

A4s Pro | Quick Start Guide

Contact Us




Email Us

Technical Support
support@iliferobot.com



Tweet Us

@ILIFEROBOTICS
Mon-Fri: 9:00am - 18:00pm
Sat: 9:00am - 12:00am (GMT+8)

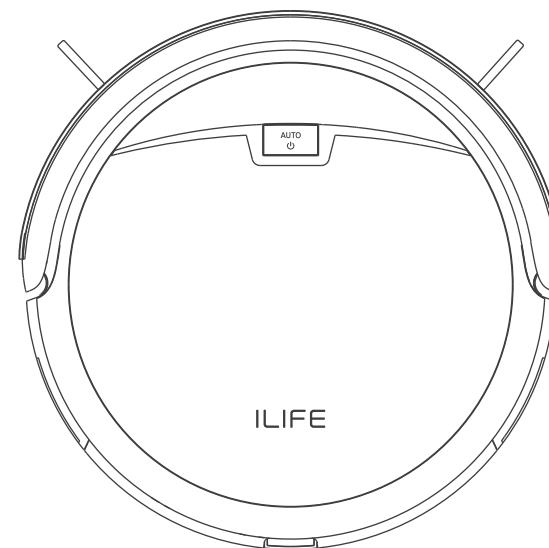

ILIFE Customer Service


Toll-Free Number:

1-800-631-9676 (USA and Canada)

(Mon-Fri: 9:00 am - 5:00 pm CST)



1. Positioning the charging dock.

- Place the charging dock against a wall and connect the adapter to an outlet. It is suggested to leave an area with at least 4 feet (1 meter) on each side of the charging dock, and at least 8 feet (2 meters) in front of the charging dock. Do not place the charging dock around doors and stairs.
- For optimizing performance of your robot, try best to place the charging dock in an open and uncluttered area.



2. Wake up and charge your robot

- Turn on the power switch at the side of body, then place your robot on the charging dock for a full charge. When charging is finished, all lights will turn off.



- Always keep the power switch turned on during your daily use. Turn off the power switch only when you don't use your robot for more than one week.

• A4s Pro is ready to clean

1 To start

- Make sure the power switch is on.
 - Press **AUTO** button on robot or **▶** button on remote control to start cleaning.
- * If robot is in sleep mode, press **AUTO** button to recover it from sleep mode. Press **AUTO** button again to start the cleaning cycle.

2 Pause

- Press **AUTO** button on robot or **▶** button on remote control to change from Clean mode to selected mode.
- * When robot is paused, press **AUTO** button to resume the cleaning cycle.

3 Sleep

- Change from selected mode to sleep mode:
- Press and hold **AUTO** button on robot for 3 seconds.
 - Robot automatically enters sleep mode if no command is received after 45 seconds.

• Scheduling

• Setting local time

- Point the remote control towards the robot.
(Make sure the power switch is on.)
- Press **⌚** and then use directional buttons to set the correct time.
- Press **⌚** to save the setting.



• Setting a schedule

When a schedule is confirmed, robot will start cleaning automatically at the same time every day. If the robot is turned off, you will need to schedule again.

- Point the remote control towards the robot.
- Press **⌚** and then use directional buttons to set the scheduled.
- Press **⌚** to save the setting. To cancel the schedule, please set the time to 00:00 or turn off the robot.

• Robot Maintenance

- For better cleaning performance, empty dustbin and clean high performance filter after each use (High Performance Filter can't be washed with water). Replace with a new one when it is needed.
- In homes with heavily shedding pets, dustbin may fill quickly with fur or hair. In these cases, you may need to empty dustbin and clean filters more frequently.



• Trouble Shooting

• Error code sheet

The robot will remind you by beeping or erratic movements when it is malfunctioning.

- Short tone

No.	Tone	Possible Cause	What to do
01	•	Side wheels or side brushes issues	<ul style="list-style-type: none"> Clean side wheels and side brushes. Make sure they can rotate smoothly.
02	••	Cliff sensor or bumper sensor failure	<ul style="list-style-type: none"> Clean cliff sensor. Check if the bumper can bounce freely.
03	•••	Robot gets stuck	Move the robot and restart.
04	••••	Main brush failure	<ul style="list-style-type: none"> Remove main brush. Clean and reinstall the main brush.

Note: If all above solutions don't work, please take below actions.

- Re-set the robot by re-turning on the power switch.
- If re-set action doesn't work, please contact support@iliferobot.com